

Round push button
WJ-B02



Round push button
WJ-B04



Square push button
WJ-C02



AC Switch



Push button



Door Switch 3P



Joystick WJ-E03



CRYSTAL JOYSTICK (水晶搖桿)



JS-EPC-BU-45-CR-CCR JS-EPC-BU-45-CG-CCG JS-EPC-BU-45-CB-CCB JS-EPC-BU-45-CP-CCP

OPTICAL JOYSTICK (帶燈搖桿)



JS-EPCR-BU-45-CR-CT JS-EPCY-BU-45-CY-CT JS-EPCB-BU-45-CB-CT JS-EPCG-BU-45-CG-CT JS-EPCW-BU-45-CW-CT


RGB LED JOYSTICK (RGB搖桿)

MODEL:JS-EPCM



JS-EPCM-BU-45-CW-CT

CONNECT PIN 1	
PIN NAME	FUNCTION
+	DC+12V
-	GROUND
1	LED FLASH
2	LED RED
3	LED GREEN
4	LED BLUE



CONNECT P2&P3
For extend light of LED output 50ma each. (Max)

Joystick WJ-E04



Joystick WJ-E08



NORMAL JOYSTICK (一般搖桿)



MODEL:JS-C-S



MODEL:JS-S



SHOOTING JOYSTICK (飛行搖桿)

FEATURES

- 1.8 ways design.
2. Two buttons operation.
3. For shooting gaming machine.

MODEL:JS-C-AIR



AC COOLING FAN AF-0825A1




DC COOLING FAN DF-12038D1



江唐光電有限公司
YCCT Opto-Electronic Tech Co.,Ltd.


Rm. B, No.1~37, Jiangshan Rd., Daliao Dist.,
Kaohsiung City, Taiwan. 83146
Email: s9282@ms51.hinet.net
Tel: +886-7-7027770 Mobil: 0935-881170

Magnetic Counter – CL Type



Digits	Model NO.
6 Digits	OA-056CL
	OA-126CL
	OA-246CL
7 Digits	OA-057CL
	OA-127CL
	OA-247CL

Model	Voltage Range	Speed/Sec	Power
OA-056CL 057CL	4 - 8 VDC	15 CPS	1.5W
OA-126CL 127CL	9 - 15 VDC	15 CPS	1.2W
OA-246CL 247CL	20 - 30 VDC	15 CPS	1W




Magnetic Counter – PC Type



Digits	Model NO.
6 Digits	OA-056PC
	OA-126PC
	OA-246PC
7 Digits	OA-057PC
	OA-247PC

Model	Voltage Range	Speed/Sec	Power
OA-056PC 057PC	4 - 8 VDC	15 CPS	1.5W
OA-126PC 127PC	9 - 15 VDC	15 CPS	1.2W
OA-246PC 247PC	20 - 30 VDC	15 CPS	1W

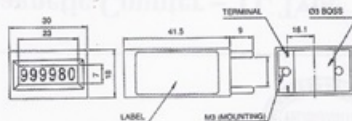


Magnetic Counter – TL Type



Digits	Model NO.
6 Digits	OA-056TL
	OA-126TL
	OA-246TL
7 Digits	OA-057TL
	OA-127TL
	OA-247TL

Model	Voltage Range	Speed/Sec	Power
OA-056TL 057TL	4 - 8 VDC	15 CPS	1.5W
OA-126TL 127TL	9 - 15 VDC	15 CPS	1.2W
OA-246TL 247TL	20 - 30 VDC	15 CPS	1W



江唐光電科技有限公司

YCCT Opto-Electronic Tech Co.,Ltd

Rm. B, No.1~37, Jiangshan Rd., Daliao Dist.,

Kaohsiung City, Taiwan. 83146

Email: s9282@ms51.hinet.net

Tel: +886-7-7027770 Mobil: 0935-881170

The professional manufacturer for power supply, LCD panel and spare parts of Coin-op game machine.

Power supply for crane machine and basketball machine



Advantage: Easy to assemble, save cost, and long service life.
 Feature: Protect motherboards with short circuit, overload and over voltage from burning.
 With RoHS & CE certificates

NEW Coin acceptor

NEW Bill Acceptor



Power Supply For Slot Machine & LCD

Crane machine kits

Crane machine kits

LED Flexible Strip Light LED fluorescent



Power Supply for PC


Power Supply for PC

The power supply for Industry, Amusement and Entertainment

LED fluorescent tube

Static Single Color, Full Color, Dynamic Marquee, etc.

Slot machine power DC Motor with SSR



www.ycchitang.com.tw

CCFL & Inverter

LCD Monitor 16:9



Amplifier Stereo Speaker

Isolation Transformer

SSR / DC SSR

EMI Filter


AC/DC Fan




Power supply for crane machine and basketball machine



2SP-2024T



2SPM-973048TOY



2SPM-973057TOY



GWX-4840AX



2SP-4830T



2SP-4815D



2SP-4830S



Advantage: Easy to assemble, save cost,
and long service life

Feature: Protect motherboards with short circuit,
overload and over voltage from burning.

With RoHS & CE certificates

LED Light Strip

LED柔性霓虹灯带
 隨處造型戶外防水防霉防腐, 廣泛应用于戶外樓體裝飾、
 街道亮化、酒店、酒吧、KTV、廣告牌、室內裝飾吊頂等等

2.5cm/1剪 可做字體的灯带
DC 12V

高亮2835貼片灯珠120灯/米



配件

Features:
 This product uses rigid PCB installed in Aluminum alloy housing.
 It is good looking and disperse heat well. Good for lighting in the corner, cupboard, backlighting where there is not much space.




Parameter: Size: 20(W) * 17(H) Length: Less than 1.5 Meters LED: Made to order LED Type: 5050/3528/Super Flux IP Rated: Non waterproof or IP68	Parameter: Size: 20(W) * 12(H) Length: Shorter than 1.5M LED: Made to order LED Type: 5050/3528/super flux	Parameter: Size: 12(W) * 10(H) Length: Less than 1.5M LED: Made to order LED Type: 5050/3528/Super Flux IP Rating: waterproof or non-waterproof IP rated: IP68
--	---	--



Parameter: Size: 20(W) * 12(H) Length: Shorter than 1.5M LED: Made to order LED Type: 5050/3528/Super Flux	Parameter: Size: 20(W) * 17(H) Length: Shorter than 1.5M LED: Made to order LED Type: 5050/3528/Super Flux IP Rated: IP68	Parameter: Size: 20(W) * 17(H) Length: Less than 1.5M LED: Made to order LED Type: 5050/3528/Super Flux IP rated: IP68	Parameter: Size: 20(W) * 17(H) Length: Less than 1.5M LED: Made to order LED Type: 5050/3528/Super Flux IP rated: IP68
---	---	--	--

Examples of application:

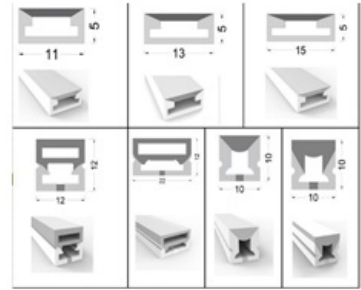

Battery Box 12V 1~5A LED Light Frame

Uninterruptible Power Supply



黑武士UPS系列

高品質電源保護，適用於小型伺服器、工作站及個人電腦

- CPU微處理器控制，在線互動式設計
- 自動高低電壓調節功能 (AVR)
- 全機無雜音，適用於電壓不穩的地區
- 智慧型自動省電功能 (UPS綠色環保模式)
- 網路過壓保護傳真機、網路網路 (INTERNET) 線路安全*
- 零路雜音設計，可連接高負荷設備而不損壞UPS
- 智能省電功能，在沒有市電及負荷下自動關閉UPS
- LED清晰顯示市電、電池供電、電池故障
- 超優質高容量電池，電池使用壽命特長
- 50/60Hz頻率自動檢測及設定
- 雷擊突波保護，雜訊濾波功能、短路及過載保護
- 先進電池管理，增長電池使用壽命
- 直洩電啟動 (黑市電可開機)
- * 此系列僅適用於網路型機種

Line Interactive UPS

在線互動式-不斷電系統



額定容量: 600VA / 650VA / 1000VA / 2000VA / 3000VA

Line Interactive UPS是一專為個人電腦設備、傳真事務設備、Line Interactive UPS產品具有極佳的功能。

• 600VA-3000VA 共四種產品特色

- 防靜電干擾、工廠直銷供應
- 具有安全警報之保護
- 具有斷、過載、雜音及短路保護能力
- 內置電壓電流監控和系統，確保高穩定性
- 原裝電池可直洩啟動 (DC 轉換) - 冷熱機功能
- 清晰介面：電話/數據機/傳真及網路線路突波保護
- 內置定電壓與定電流的電池充電器，保護電池不過充過放

• 100VA-1200VA 共四種產品特色

- 液晶面板可清楚顯示不斷電系統各種狀態
- 頻率50/60Hz具有自動調節的功能
- 內置設備含有7段式升壓和1段式降壓的穩壓功能，來精確輸入電壓提供最佳電源品質

• 2000VA-3000VA 共二種產品特色

- 液晶面板可清楚顯示不斷電系統各種狀態
- 可備充電電池，來延長放電時間 (選配)

• 最佳應用:

- 個人電腦、收發機、電話通訊設備系統、網路設備、監控設備系統、小型工作站系統、家電產品設備、辦公室務設備系統、電腦輔助教學設備、保安監控設備



King Time 金時代電機企業有限公司

在線互動式-不斷電系統

Line Interactive UPS 規格表: 在線互動式-不斷電系統

容量	650VA/360W	1000VA/500W	600VA/360W	1000VA/500W	2000VA/1100W	3000VA/1800W
輸入	110V系統: 86VAC-144VAC 220V系統: 172VAC-288VAC					
電壓範圍	50Hz 或 60Hz					
頻率	50Hz 或 60Hz (自動偵測)					
輸出	50Hz 或 60Hz					
電壓系統	110/115/120VAC 或 220/230/240VAC (+/- 10%)					
頻率	50Hz 或 60Hz (+/- 1Hz)					
波形	模擬正弦波					
轉換時間	< 6ms					
電池	密封式鉛酸免保養電池					
電池類型	密封式鉛酸免保養電池					
電池電壓	12VDC			48VDC		
放電時間	根據負載條件而定					
電池充電	5小時可充至90%以上電位					
電池保護	防止電池過充保護及保險絲短路保護					
功能	LED顯示顯示UPS狀態					
警報顯示	LED顯示顯示UPS狀態			液晶顯示顯示UPS功能狀態		
電話網路保護插座	RJ-11			RJ-11/RJ-45		
突波壓擊保護	240焦耳					
自動穩壓器功能	升壓/降壓					
保護輸出短路裝置	市電模式: AC保險絲及電子過路保護; 電池放電模式: 電子過路保護					
警報聲音	放電模式、電池低電壓、過載					
機型外型	提供一年保固 (不含人工/天災因素除外)					
尺寸 (長×寬×高) MM	290*95*170MM			390*182*285MM		
重量	6.5Kgs	7.5Kgs	6.5Kgs	7.5Kgs	25Kgs	28Kgs
保固	提供一年保固 (不含人工/天災因素除外)					

金時代電機企業有限公司
 地址: 台中市大里區大里街168-18號
 電話: (04) 24061834 / 22201833 / 24064370 傳真: (04) 24064370
 公司網址: www.kingtime.com.tw 信箱: kingtime@ms71.hinet.net
 大陸深圳服務處: 大鵬華東服務處 江蘇蘇州服務處



規格表

型號	BNT-800AP	BNT-1200AP	BNT-1500AP	BNT-2000AP
容量	1000VA	1200VA	1500VA	2000VA
輸入	100V, 110V, 115V, 120V, 220V, 230V, 240V ± 25% 市電範圍UPS			
輸出	50 or 60 Hz ± 1.2% (自動偵測)			
電壓 (備用模式)	額定電壓 100V, 110V, 115V, 120V, 220V, 230V, 240V ± 5%			
電壓 (備用模式)	50 or 60 Hz ± 1Hz			
自動電壓調整 (AVR)	當輸入電壓低於市電 9% 至 25% 時, AVR 自動調整 15% 當輸入電壓高於市電 9% 至 25% 時, AVR 自動調整 13%			
停電應變時間	34ms (含負載時間)			
保護及測試	1005 瓦耳, 820µs for 100V-120V model, 420 瓦耳, 820µs for 220V-240V model			
網路輸入	僅在及預設保護 (僅充保線器)			
遊戲保護	當負載超過 110%, 0.8 秒後, UPS 自動關機, 負載超過 130%, 3 秒後, UPS 自動關機			
電機 I/O Base-T Cable Port	有			
功能	UPS 輸出端口有電壓輸入保險絲保護			
電池	密封式鉛酸免保養電池			
充電時間	6 小時 (充電至 90% 以上)			
保固	提供一年保固 (不含人工/天災因素除外)			
備用時間 (一般PC電腦)	4-40 分鐘	4-40 分鐘	4-40 分鐘	4-40 分鐘
備用時間 (一般PC電腦)	4-40 分鐘	4-40 分鐘	4-40 分鐘	4-40 分鐘
外置尺寸	淨重 (kg) (lbs)	13.4 (29.6)	14.8 (32.6)	15.8 (35.0)
尺寸	14.8 (32.6)	14.8 (32.6)	17.3 (38.0)	17.3 (38.0)
W x D x H mm	130 x 95 x 170 (5.1" x 3.7" x 6.7")			
輸入插頭	IEC 320 標準			
輸出插頭	NEMA 5-15R/IEC01/IEC 320 female appliance coupler (220V)			
備用模式	標準電壓 (about 0.47 Hz)			
電池充電器	快速充電 (about 1.824 Hz)			
保固	提供一年保固			
介質	RS-232 介面			
備用時間	備用時間 (分鐘)			
備用時間	備用時間 (分鐘)			
備用時間	備用時間 (分鐘)			
備用時間	備用時間 (分鐘)			

江唐光電科技有限公司
 YCCT Opto-Electronic Tech Co., Ltd

Rm. B, No.1~37, Jiangshan Rd., Daliang Dist.,
 Kaohsiung City, Taiwan. 83146
 Email: s9282@ms51.hinet.net
 Tel: +886-7-7027770 Mobil: 0935-881170



LED LIGHT



WJ-Z03

WJ-Z02

WJ-Z01

ILLUMINATED LIGHT 中獎燈

MODEL NUMBER (型號表)					
燈罩型 LIGHT CASE	燈身 TYPE	燈體顏色 BODY COLOR	燈級 LEVEL	燈色 COLOR	LED燈型 LED BULB
EX: IL	V	ES	2	RY	L
請注意中獎燈: 燈殼 1(2) 燈架 1(2) 燈罩 (LED)					
TYPE	BODY COLOR	LEVEL	COLOR	LED BULB	
V	ES-SILVER (注意)	1	R-RED B-BLUE Y-YELLOW G-GREEN W-WHITE	L-LED	
VS	EG-GOLD (注意)	2		B-BULB	
HR	BK-BLACK (注意)	4			
		5			
H		2	R-RED B-BLUE Y-YELLOW G-GREEN		
		3			

LED for ILLUMINATED LIGHT TYPE: V / VS / HR



TYPE:HR (橫式圓筒中獎燈)



IL-HR-ES-4-BGRY-B

IL-HR-ES-5-WBGRY-B



TYPE:V (直立圓筒中獎燈)




IL-V-ES-1-R-B

IL-V-ES-2-RY-B

IL-V-EG-2-BW-B

IL-V-ES-3-GRY-B


TYPE:VS (直立短筒中獎燈)



IL-VS-ES-2-RY-B

IL-VS-ES-3-GRY-B

TYPE:H (橫式中獎燈)




IL-H-2-ES-RG

IL-H-3-ES-RY-R-B

IL-H-2-BK-RG

IL-H-3-BK-RY-G-B

TYPE:M (圓面中獎燈)




IL-M-A


IL-M-B

IL-M-C

TYPE:C (皇冠中獎燈)



TYPE:CA (蠟燭型中獎燈)



TYPE:CR (新月中獎燈)



Speaker



ST 2*5AP 10W 8Ω ST 4*4 10W 8Ω


ST 8*8AH
40~60W 8Ω



ST 2吋~8吋
3~60W 4~8Ω



P. Single & Stereo Speaker



Specification:

Item No.	Model No.	Input Power (W)	Nominal Impedance (Ω)	Lowest Resonant Frequency (Hz)	Size(mm) Dimensions W×H×D	Max. Input Power (W)	Harmonic Distortion	Sound Pressure Level(dB)	Weight (kgs)
P01-1	ST-4"	Rated:5W Max:5W	8Ω ± 15%	110Hz ± 20%	107×107	5W	<5(%)	85dB ± 3dB	0.15
P01-2	ST3×5"AP	Rated:12W Max:15W	8Ω ± 15%	110Hz ± 20%	78×128×53	12W	<5(%)	83dB ± 3dB	0.25
P01-3	ST-4×4"AT	Rated:15W Max:20W	8Ω ± 15%	150Hz ± 20%	105×105×50	20W	<5(%)	85dB ± 3dB	0.40
P01-4	ST4×4"AH	Rated:15W Max:30W	8Ω ± 15%	100Hz ± 20%	105×105×56	30W	<5(%)	85dB ± 3dB	0.45
P01-5	ST-2×5"AP	Rated:10W Max:15W	8Ω ± 15%	120Hz ± 20%	58×126×48	15W	<5(%)	87dB ± 3dB±5%	0.20
P01-6	ST-5×5"AP	Rated:15W Max:20W	8Ω ± 15%	70Hz ± 20%	130×130×52	20W	<5(%)	88dB ± 3dB±5%	0.50
P01-7	ST-6×6"AX	Rated:30W Max:40W	8Ω ± 15%	50Hz ± 20%	156×156×79	40W	<5(%)	86dB ± 3dB±5%	0.72
P01-8	ST-8×8"AX	Rated:30W Max:40W	8Ω ± 15%	65Hz ± 20%	253×253×110	40W	<5(%)	94dB ± 3dB±5%	0.92
P01-9	ST-3×3"AP	Rated:12W Max:15W	8Ω ± 15%	110Hz ± 20%	78×78×46	15W	<5(%)	86dB ± 3dB±5%	0.30

ST 3*5AP 15W8Ω



Rm. B, No.1~37, Jiangshan Rd., Daliao Dist.,

Kaohsiung City, Taiwan. 83146

Email: s9282@ms51.hinet.net

Tel:+886-7-7027770 Mobil:0935-881170

江唐光電科技有限公司

YCCT Opto-Electronic Tech Co.,Ltd

LED Light



T8-200W-4 Meter



T5-5W-1 Meter



LED球泡系列参数对照表

功率	发光颜色	色温	产品材质	芯片	灯珠数量	光通量	驱动	电压	工艺	发光角度	散热数量
3W	正白	6500K	铝材	S730	6	50-60LM	IC恒流	220V	车插	180°	100
5W	正白	6500K	铝材	S730	10	50-60LM	IC恒流	220V	车插	180°	100
7W	正白	6500K	铝材	S730	14	50-60LM	IC恒流	220V	车插	180°	100
9W	正白	6500K	铝材	S730	18	50-60LM	IC恒流	220V	车插	180°	100
12W	蓝白	6500K	铝材	S730	24	50-60LM	IC恒流	220V	车插	180°	100

家居常用系列 LED 球泡



TFT-LCD Monitor

22~42 inch
16:10



10~19 inch
16:9 Include accessories



Capacitive
Touch panel



LCD25~65
power 24V5A-
5V3A-12V2A-

SME-ADB-GM01

SME-ADB-NT01

VGA+DVI+HDMI



LCD Accessories 10~24inch



LCD Power
10~24inch



EMI Filter

CW1D

3A~10A 60~100



CW2A

3A~10A 180~250



CW2B

3A~10A 150~200



CW3A~20A



K. EMI Filter



3A
L = 2X0.8mH
CX=0.1uF
CY=2X3300pF
R=1MΩ

6A
L = 2X0.8mH
CX=0.22uF
CY=2X2200pF
R=1MΩ


10A
L = 2X0.3mH
CX=0.1uF
CY=2X3300pF
R=1MΩ

20A
L = 2X0.5mH
CX=0.1uF
CY=2X3300pF
R=1MΩ

Features:

- Rated voltage
- Rated current
- Operating frequency
- Low current
- Hipot testing: (at one min.)
- Insulation resistance
- Direct current resistance
- Operating temperature
- Switch: without light
- Approvals: ce, rohs

Circuit diagram



Specification:

Item No.	Model No.	Rated Voltage (V)	Rated Current (A)	Measurement (LxWxH:mm)	Pitch (mm)	Weight (kg)	Package Pcs/Case
K01-1	CW-2A-3A-T	25250 AC	3A	57x29x546	40 ± 0.05	0.08	300
K01-2	CW-2A-6A-T	25250 AC	6A	57x29x546	40 ± 0.05	0.08	300
K01-3	CW-2A-10A-T	25250 AC	10A	57x29x546	40 ± 0.05	0.08	300
K01-4	CW-2B-3A-T	25250 AC	3A	47x28x46	40 ± 0.05	0.08	300
K01-5	CW-2B-6A-T	25250 AC	6A	47x28x46	40 ± 0.05	0.08	300
K01-6	CW-2B-10A-T	25250 AC	10A	47x28x46	40 ± 0.05	0.08	300
K01-7	H1A-9010-SFP03	25250 AC	3A	49x29x48.5	40 ± 0.05	0.08	300
K01-8	H1A-9010-SFP06	25250 AC	6A	49x29x48.5	40 ± 0.05	0.08	300
K01-9	H1A-9010-SFP10	25250 AC	10A	49x29x48.5	40 ± 0.05	0.08	300
K01-10	CW4-15A-T	250V AC	15A	109x51x29	75 ± 0.05	0.15	300
K01-11	CW4-20A-T	250V AC	20A	109x51x29	75 ± 0.05	0.15	300

Rm. B, No.1~37, Jiangshan Rd., Daliao Dist.,

Kaohsiung City, Taiwan. 83146

Email: s9282@ms51.hinet.net

Tel: +886-7-7027770 Mobil: 0935-881170

江唐光電科技有限公司
YCCT Opto-Electronic Tech Co., Ltd

Automatic Voltage Regulator



ISO 9001 認證 電源設備專業製造廠

容量：1KVA~300KVA

穩壓器簡介

由於工業用配電不良，以及國內交流電力質量不足，致成電力品質低劣，保護機器設備電路的影響，電壓不穩定，時高時低，造成之影響甚為深遠，造成許多高科技設備及精密生產機器，故障率增高，生產效率降低，因此只要經過穩壓設備，就可降低故障率，提高生產良品率。

適用範圍

CNC機床、自動化機械、PCB製板機、鍍金機、放電加工機、雷射機、自來水處理機、自動取款機、電子及醫療儀器、OA電腦設備及網路產品、自動機械手臂、自動編織機、SMT自動化設備等。



三相輸出
電壓顯示



AUTOMATIC VOLTAGE REGULATOR

自動電壓穩定器



特點

- 三相分離調整：當輸入電源三相電壓不平衡時，亦可將電壓調整至三相平衡。
- 全靜態式驅動：採用靜態調整電路，無火花、電噪聲、壽命長。
- 模塊化設計：採用靜態電壓及維修之模塊化設計，可大顯維修保養及維修時，(MTTR)短(30分)
- 高效率：採用高磁通之矽片，降低磁心損失，提升使用效率，節省電費。
- 精準精確：穩壓精度±1% (可設定±0.5%、±1%、±2%、±3%、±5%或客戶需要之設定)
- 波形成失真：內部為純線性，主調器無以AC等元件，故輸出波形失真度小於1%，大大提升電壓使用品質。
- 保護及保護：IC板採用數位化設定調整設計，密精穩定，超壓保護，低壓保護，超溫保護，低壓保護等均由使用者自行設定之。
- 一目了然之面板：採用LED顯示電壓，可立即察覺電壓狀況。
高 滿轉正常指示燈 (綠)、供電正常指示燈 (綠)
超壓異常指示燈 (紅)、低壓異常指示燈 (橙)
欠相異常指示燈 (紅)、零序異常指示燈 (橙)
- 欠相警報聲音：在任何一相發生欠相時，即發出了警報指示，並發出蜂鳴聲，以告知欠相故障。
- 嚴密之保護措施：除了提供精準之穩壓外也提供精準之保護措施，包含：欠相、超壓、超溫。
- 手動調整及旁路功能：在故障排除時，除了提供旁路供電功能外，還可再提供手動調整功能，可使您由手動調整，來提供可用之旁路電源。
- 雙重鎖機保護：控制輸出採用雙重鎖機投入及雙重鎖機切斷，可防止工人誤觸開關。

技術規範

- 結構：電子式調整
- 輸入電壓：
 - 1. 單相二線式(0M, 110V, 115V, 200V, 220V, 230V, 240V, 380V)
 - 2. 三相三線(0M), 110V, 220V, 230V, 240V, 380V
 - 3. 三相四線(0M), 110V, 198V, 208V, 400V, 415V
- 輸出電壓：
 - 1. 單相二線式(0M), 110V, 115V, 120V, 125V, 200V, 220V, 230V
 - 2. 三相三線(0M), 110V, 220V, 115V, 230V, 120V, 240V
 - 3. 三相三線(0M), 200V, 220V, 230V, 240V, 380V
 - 4. 三相四線(0M), 110V, 198V, 208V, 380V, 415V
- 標準：
 - 1. 符合IEEE
 - 2. 符合IEC
 - 3. 符合UL
- 調整方式：
 - 1. 自動調整
 - 2. 手動調整
 - 3. 旁路調整
- 穩定度：
 - 1. 穩定度±1% (±0.5%、±3%、±5%、±10%)
 - 2. 輸出穩定度：
 - (+1%) ±0.5% ±5% 可選
- 調整範圍：
 - 1. 調整範圍±10% (±5%、±10%、±15%)
 - 2. 調整範圍±15% (±10%、±15%、±20%)
- 效率：
 - 1. 高效率(調整範圍±10%~15% 滿載時約95%)
- 波形成失真：
 - 1. 失真度(THD) < 0.5%
- 反應時間：
 - 1. 0.1s (調整範圍±10%)
- 不平衡負載穩定度：
 - 1. 輸出電壓(THD) < 0.5% (調整範圍±10%)
- 輸出電壓：
 - 1. 輸出電壓(THD) < 0.5% (調整範圍±10%)
- 輸出電壓顯示：
 - 1. 三相正電壓指示燈 (綠)
 - 2. 輸出電壓指示燈 (綠)
 - 3. 輸出電壓指示燈 (紅)
 - 4. 輸出電壓指示燈 (橙)
 - 5. 欠相指示燈 (紅)
 - 6. 超壓指示燈 (紅)
- 警報聲音：
 - 1. 欠相異常警報聲音(紅)
 - 2. 超壓異常警報聲音(橙)
- 溫度保護：
 - 1. 0~40°C
- 環境溫度：
 - 1. 10~50°C(滿載)

規格容量

單相機種		三相機種	
型號	容量	型號	容量
AVR-200	2 KVA	AVR-1000	4 KVA
AVR-300	3 KVA	AVR-1500	10 KVA
AVR-400	4 KVA	AVR-2000	15 KVA
AVR-500	5 KVA	AVR-2500	20 KVA
AVR-750	7.5 KVA	AVR-3000	25 KVA
AVR-1000	10 KVA	AVR-4000	30 KVA
AVR-1500	15 KVA	AVR-5000	40 KVA
AVR-2000	20 KVA	AVR-6000	50 KVA
AVR-2500	25 KVA	AVR-7500	75 KVA
AVR-3000	30 KVA	AVR-10000	100 KVA
AVR-3500	35 KVA	AVR-12500	125 KVA
AVR-4000	40 KVA	AVR-15000	150 KVA

※ 特殊規格或容量可另行洽詢 ※ 規格如有更改恕不另行通知 ※ 本系列所有機型容量均可達300KVA

適用場合及設備

CNC機床、自動化機械、PCB製板機、鍍金機、放電加工機、雷射機、自來水處理機、自動取款機、電子及醫療儀器、OA電腦設備及網路產品、自動機械手臂、自動編織機、SMT自動化設備等。



江唐光電科技有限公司
YCCT Opto-Electronic Tech Co.,Ltd

Rm. B, No.1~37, Jiangshan Rd., Daliuo Dist.,
Kaohsiung City, Taiwan. 83146
Email: s9282@ms51.hinet.net
Tel: +886-7-7027770 Mobil: 0935-881170



Bill Acceptor

General Specifications

	TP1	TP1-5	TP2	TP2-5
Acceptance Rate	96% or greater	96% or greater	96% or greater	96% or greater
Transaction Time	< 2 seconds	< 3 seconds	< 2 seconds	< 3 seconds
Interface	Pulse, RS232, ccTalk, ID003	Pulse, RS232, ccTalk, ID003	Pulse, RS232, ccTalk, ID003	Pulse, RS232, ccTalk, ID003
Installation	Indoor	Indoor	Indoor	Indoor
Bill Insertion	4-ways acceptable	4-ways acceptable	4-ways acceptable	4-ways acceptable

Electrical Specifications

	TP1	TP1-5	TP2	TP2-5
Power Source	12V DC \pm 10%	12V DC \pm 10%	12V DC \pm 10%	12V DC \pm 10%
Power Consumption	Standby: 0.21A~0.35A Max.Operating: 2.2A	Standby: 0.21A~0.35A Max.Operating: 3A	Standby: 0.21A~0.35A Max.Operating: 2.2A	Standby: 0.21A~0.35A Max.Operating: 3A
Operation Temperature	0°C~55°C	0°C~55°C	0°C~55°C	0°C~55°C
Storage Temperature	-20°C~70°C	-20°C~70°C	-20°C~70°C	-20°C~70°C
Humidity	30%~85%RH (no condensation)	30%~85%RH (no condensation)	30%~85%RH (no condensation)	30%~85%RH (no condensation)

Mechanical Specifications


	TP1	TP1-5	TP2	TP2-5
Cash Box Capacity	No	< 500 pcs	No	< 500 pcs
Weight	650g ~ 750g	1500g ~ 1650g	650g ~ 750g	1500g ~ 1650g
Outline Dimension	135mm x 93mm x 139mm	290mm x 93mm x 223mm	135mm x 110mm x 135mm	290mm x 110mm x 225mm
Bill Accepted Width	62mm~70mm	62mm~70mm	66mm~77mm	66mm~77mm

TP Series

Model : TP1



Model : TP2

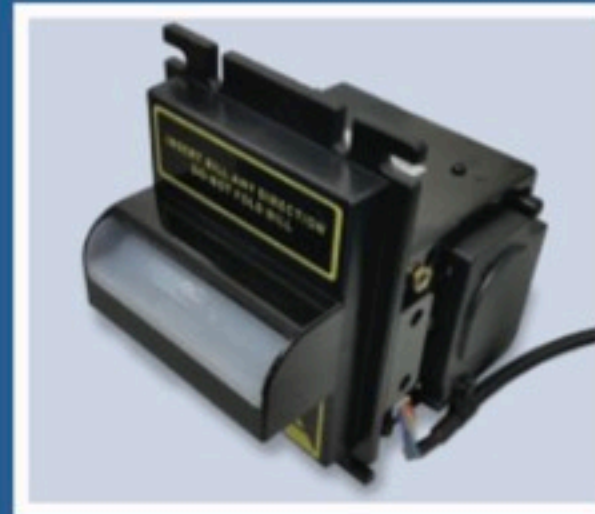


Model : TP1-5



Model : TP2-5



WIRE SET

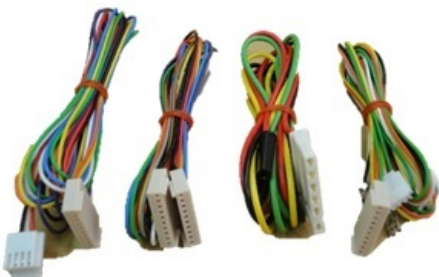

FEATURES

1. Welcome OEM as customer's samples.
 2. We also provide various kind of housing & terminal, AC cord, and connector.
1. 提供異業定標準品，依顧客樣品製作。
2. 多種規格端子、端子殼、AC線、連接器供客戶使用。

CONNECTOR for BUTTON



WIRE SET



CONNECTORS



HOUSING & TERMINAL



USB CABLE 	PC/M CABLE 	USB CONNECTOR 	D-SUB CONNECTOR
DISPLAYPORT CABLE 	AVI CABLE / IEEE 1394 CABLE 	RJ CONNECTOR 	PCBA
LAN CABLE / RF CABLE 	CUSTOM: ULS, FIBER, WIRELESS, WATER PROOF CABLE 	INDUSTRIAL / VIBROKOL / VIBROZEL / SILICON / LIQUID CABLE 	
SATA CABLE / SAS CABLE / SCSI CABLE 			

Connect With Future

江唐光電科技有限公司
YCCT Opto-Electronic Tech Co.,Ltd

Rm. B, No.1~37, Jiangshan Rd., Daliao Dist.,
Kaohsiung City, Taiwan. 83146
Email: s9282@ms51.hinet.net
Tel: +886-7-7027770 Mobil: 0935-881170

Transformer



115V-24V 6A



110V-24V 8~15A




110V-110V 1~3A



110V-110V/220V-110V
1A 1.5A 2A 3A



Toroidal
110V-12-24V 1~6A

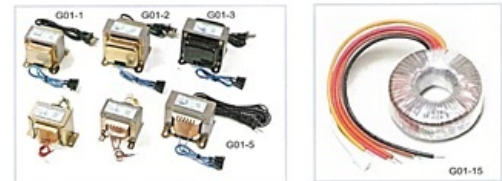

Features:

- Available to isolate case,CRT, power output.
- Prevent short circuit
- Light Weight
- Higher performance
- Extra low flux leakage
- Lower temperature
- Designated size

Application:

- Metal Cabinet(IT-10,15,30).
- On-line Machines(IT-10,15,30)
- Slot Machine(IT24,32)
- Prize Billboard(IT24,32)

Specification:

Item No.	Model No.	AC Input Voltage(V)	AC Output Voltage(V)	Current (A)	Watt (W)	Measurement LxWxH (mm)	Pcs/cta	Remark
G01-1	IT-30	110V/220V	110V	1	100	76×82×64	10	①accept to custom any specific model according to customers' demand.
G01-2	IT-15	110V/220V	110V	1.5	165	96×92×80	8	
G01-3	IT-30	110V/220V	110V	2	220	96×106×80	8	
G01-4	IT-24	110V/220V	24V	3	150	76×76×65	8	
G01-5	IT-30	110V/220V	24V	6	330	96×90×80	8	
G01-6	IT-32	110V/220V	15.5V/9.5V	2	50	78×69×66	20	
G01-7	IT-30	110V/220V	110V	3	330	118×107×102	4	
G01-8	IT-50	110V/220V	110V	5	550	137×125×120	2	
G01-9	IT-100	110V/220V	110V	10	1100	167×165×142	1	
G01-10	IT-150	110V/220V	220V	15	1600	167×190×142	1	
G01-11	IT-22	110V/220V	220V	1	220	112×107×97	4	
G01-12	IT-60	110V/220V	220V	3	660	137×135×120	2	
G01-13	IT-110	110V/220V	220V	5	1100	161×165×142	1	
G01-14	IT-120	110V/220V	220V	10	2200	190×180×170	1	
G01-15	RT-50	120V	12V	2	50	82×31×31	30	
G01-16	RT-100	120V	24V	4	100	96×35×35	20	
G01-17	RT-120	220V	12V	10	120	105×37×37	20	
G01-18	RT-150	220V	24V	6	150	113×36×40	16	

LOCKS


LOCKS 鎖頭

China
Lock




SE-091

17mm

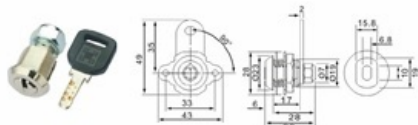

SE-092

23mm

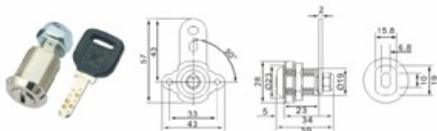


PAD LOCK
SE-04




PAD LOCK
SE-05



CAM LOCK
SE-071

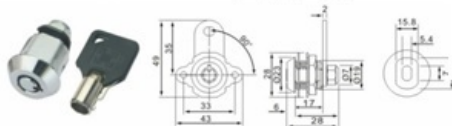

CAM LOCK
SE-072

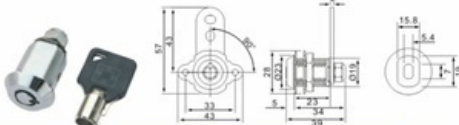

SWITCH LOCKS 電源鎖

LOCK SRS FLAT PINS



CAM LOCKS 門鎖

	tubal key	flat key	flat key
	MODEL: SRS-1	MODEL: SRS-2	MODEL: SRS-3
	MODEL: MBS-1	MODEL: MBS-2	MODEL: MBS-3
	MODEL: LBS-1	MODEL: LBS-2	MODEL: LBS-3

PRESS LOCK 按壓鎖



PAD LOCK 掛鎖

MODEL: SPL	MODEL: MPL	MODEL: LPL

LOCK ACCESSORIES 鎖頭配件

KEY SWITCH 	COLOR CODED LOCK RINGS 	KEY COVER (for tubal key only)
-----------------------	-----------------------------------	---

江唐光電科技有限公司

YCCT Opto-Electronic Tech Co.,Ltd

Rm. B, No.1~37, Jiangshan Rd., Daliao Dist.,

Kaohsiung City, Taiwan. 83146

Email: s9282@ms51.hinet.net

Tel: +886-7-7027770 Mobil: 0935-881170

Power Supply



SP115A/SR 85W



SP5012A/SR 120W



SM309ASR



2SM309ASR



2SP 150W-200W



GWX2008A-200W



GWX2450-280W



PCX3514A-350W



LCD Power Supply 12w-60w

江唐光電科技有限公司
YCCT Opto-Electronic Tech Co.,Ltd

Rm. B, No.1~37, Jiangshan Rd., Daliao Dist.,
Kaohsiung City, Taiwan. 83146
Email: s9282@ms51.hinet.net
Tel: +886-7-7027770 Mobil: 0935-881170

