

Hiking tours, trekking tours, camping picnics, cycling trips,
Field guide, vehicle broke down warning, power outage lighting...



3 in 1 illumination



play music + sing songs



bluetooth speaker

LIGHTSONG

3 in 1 illumination +
play music + sing songs

ML-05G



Easy to carry, lightweight and handheld.

Large capacity battery



1. Built-in large capacity battery provides long-lasting battery life.
2. Bluetooth speaker with realistic sound.
3. All-aluminum alloy body, excellent heat dissipation, long life of LED light source

Bluetooth speaker



1. Taiwan's technology, high-fidelity long-stroke speakers, power of vocals, vivid and lifelike.
2. Powerful bass, sweet alto, and clear treble.
3. Bluetooth speaker with realistic sound.

Multiple usage circumstances



1. Suitable for mountain climbing, camping, outdoor activities, etc.
2. Connect to computers, mobile devices, movie theaters, and listen to music, etc.
3. Karaoke, singing practice, guided tour amplification, speaker, etc.



500
lumens brightness



Sturdy aluminum
alloy body



Built-in
Bluetooth speaker



Comes with
large hook



Three-segment light source
with flashing mode




Outdoor camping lighting and music player



Power	1W	4W	Flashing	Bluetooth
Luminance	100lu	500lu	500lu	-
Time	12hrs	3hrs	6hrs	50hrs

MIT Quality guaranteed, manufactured in Taiwan, with \$50 million product liability insurance coverage.

ML-05G / Dimensions

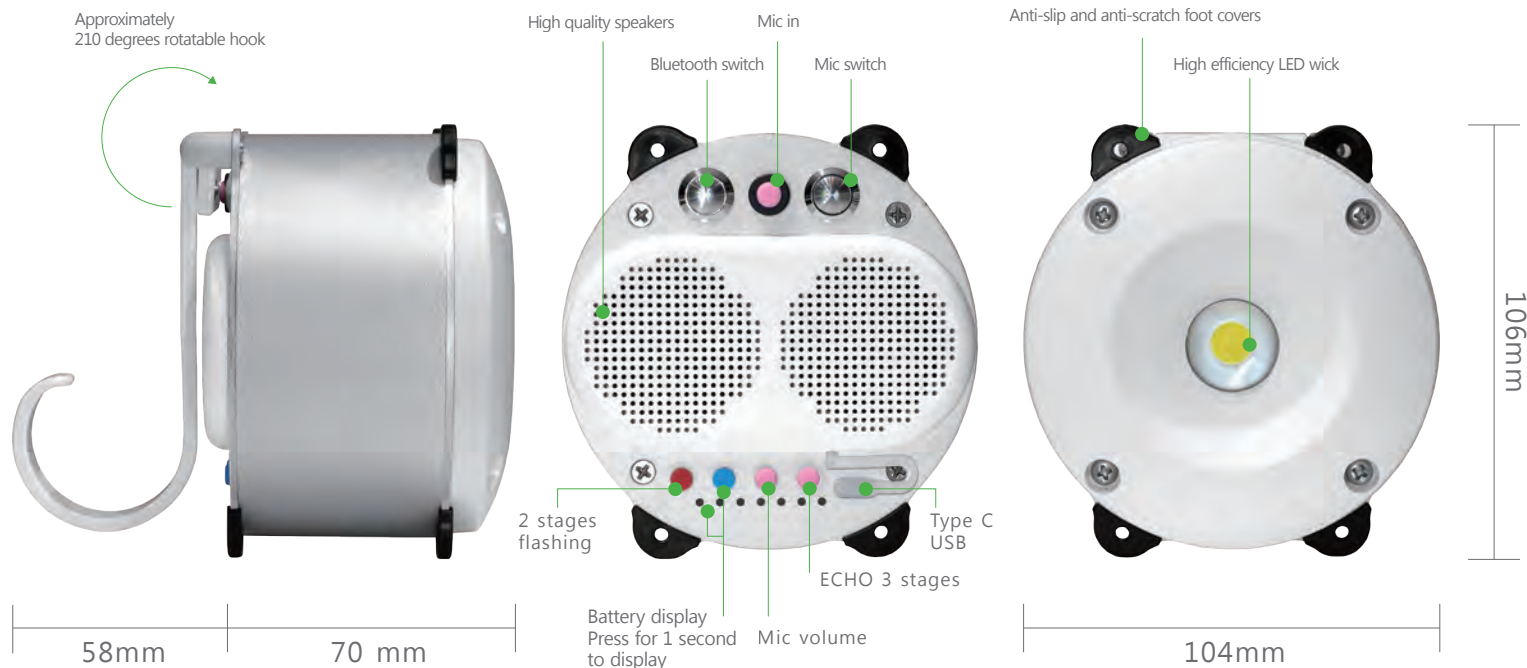

Model	ML-05G
Light Source	LED COB Integrated
Input voltage	USB Type C (DC 5V)
Battery	18650 Lithium battery 2600mAh/1 pcs (2600mAh/2 pcs for optional)
Protection	Overcharge, over discharge, Short Circuit
LED Watt	4W / 1W / Flashing Mode
Color temperature	5500K (White light) / 3000K (Warm yellow light)
Luminous Flux	Up to 500 lm
Beam angle	90°
CRI	> 70Ra
Speaker power	3W x2
Bluetooth specifications	Bluetooth 5.0
Dimensions	128(L) x 104(W) x 106(H) (With hook)
Material	Anodized Aluminum, PC Plastic
Weight	480 g

⚠ Irradiate Notice

Do not look at the LED light source directly or shine on the eyes of others to avoid eyes discomfort or harm.

LED light source will produce higher temperature, please do not irradiate flammable materials such as lighters, oxygen tanks or balloons for a long time. When using the product, please pay attention to avoid reducing LED light source life, because heat accumulation for there is a barrier to cover the LED light source.

Caution

In order to avoid any risk, please charge the light at a dry, safe place, and keep far away from humid area or high temperature environment.

Warranty void if product dismantled.

Do not use a charger with a voltage exceeding DC 5V for charging to avoid the risk of damage to the circuit protection board.

Please use the hanger properly and firmly to avoid the risk of light falling.

To avoid any damage, please do not drop the product from high position or press by heavy object.

Adult assistance is suggested when kids use the light.

To prevent damage of the battery due to discharge, the light should be charged every 6 months when the light is stored over a long period of time.

Operating Instructions

• LED Lighting mode

Turn on the red button ④ to activate the LED lighting. By default, setting the 4W lighting will be turned on. Press it again to switch to 1W lighting, press it three times for flashing mode. Press it four times to turn off the light.

• Bluetooth speaker mode

Press the ① metal button to turn on the Bluetooth mode. The Bluetooth light 🌟 at the bottom flashes quickly to indicate that it is not connected. Then turn on the Bluetooth in the connected device and search for ML-05G, which is the setting of this Bluetooth speaker. After the connection is successful, the Bluetooth light 🌟 will stay on and the music starts playing. When the volume is adjusted by the mobile phone or other connected devices, the Bluetooth light 🌟 will flash slowly.

• Microphone amplification mode

Unplug the ② pink protective cover, insert the 3.5mm connector microphone, and press the metal button ③ to activate the microphone amplification mode. With the button ⑥ below the volume can be controlled. Press once to decrease the volume, and press twice to increase the volume quickly. Press the button ⑦ can activate the echo. There are three types of echo sizes from 1 to 3. Press four times to turn off echo.

• Charging method

Unplug the ⑧ protective cover, insert the USB Type C connector, use a mobile power bank or travel charger (DC 5V), and charge the device. In the charging state the lower red light is on.

Once the battery is fully charged, the 🚫 red light will turn off, and the green light on the left will be on. The charging protection device will be automatically cut off. If you need to check the battery level, press and hold the button ⑤ for about 1 second to display the battery level on the ⑨ position light.



Status light display description

Total of 7 indicator lights from left to right

