

High Efficiency LED Street Light

- High Efficiency LED Spot Light
- High Temperature Resistance
- Withstand Rain
- High Stability



PJ-05



- ★ MIT made in Taiwan with guaranteed quality.
- ★ COB light source, light intensity is higher than SMD about 20%.
- ★ The products compared with the same wattage, the weight is the lightest and most durable
- ★ It is simple and convenient installation, suitable for various occasions and environments.
- ★ All-aluminum alloy body, heat dissipation is well, and long life of light engine.
- ★ Ceramic substrate packaging, good insulation, impact resistance and good stability.






Dimensions



Light Source	LED COB Integrated
Installation Method	Wall-Mounted
Dimensions	16W 152(L) x 102(W) x 147(H)
Input Voltage	AC 100~240V, 50 / 60Hz
Luminous Flux	115 lm/w ±5%
Color Temperature	3000K±400K / 4500K±500K / 5500K±500K
Beam Angle	120° / 90° /60° Symmetric Lens
Power Factor	> 0.50
CRI (Color Rendering Index)	> 80Ra
Applicable Environment	-20°~50°C
IPR(Ingress Protection Ratings)	IP65
Material	Anodized Aluminum
Weight	1.2 Kg

Illumination Distance

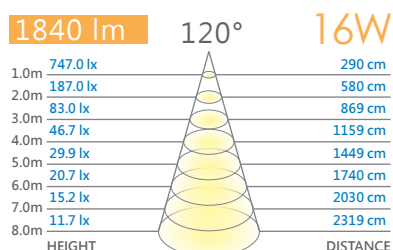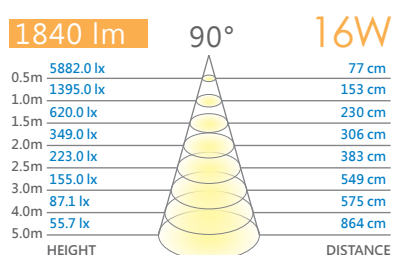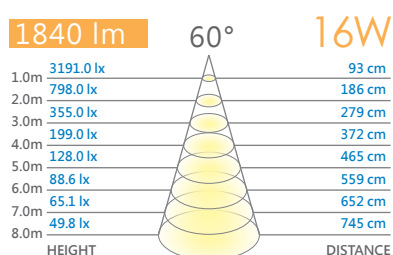

Light Source	LED COB Integrated
Installation Method	Wall-Mounted
Dimensions	25W 152(L) x 140(W) x 147(H)
Input Voltage	AC 100~240V, 50 / 60Hz
Luminous Flux	115 lm/w ±5%
Color Temperature	3000K±400K / 4500K±500K / 5500K±500K
Beam Angle	120° / 90° /60° Symmetric Lens
Power Factor	> 0.50
CRI (Color Rendering Index)	> 80Ra
Applicable Environment	-20°~50°C
IPR(Ingress Protection Ratings)	IP65
Material	Anodized Aluminum
Weight	1.5 Kg

Illumination Distance

