MODEL

BCL-220c (BCL-220c*)



專業高度一直是北宸公司追求的目標,在設計220c型自動書本鎖線機可聯接配頁機使用。

High specialty has always been Best Chen company's goal. In the design of 220c automatic book sewing machine can be connected to the gathering equipment.

特性 Features

220c型鎖線機提供了440毫米和520毫米尺寸的兩種機款,它們的最高速為每小時13,000轉。


The 220c sewing machine offers two models in sizes of 440 mm and 520 mm, with a maximum operating speed of 13,000 s/h.



12英寸彩色觸摸屏配上PLC系統能控制機器的所有功能。

The 12-inch color touch screen is equipped with a PLC system that controls all the functions of the machine.

乗成-型錄-19x26cm-PC12-CS6. indd 6 2024/5/16 下午 03:25:51

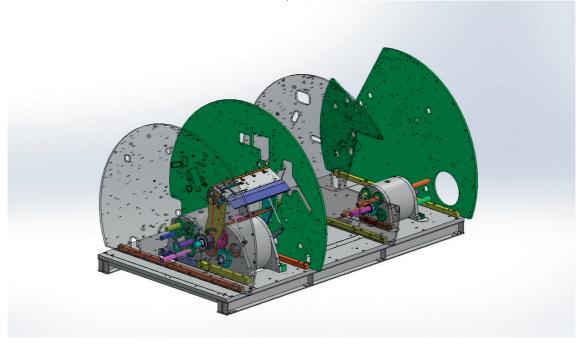

BCL-220c具有三個凸輪箱,鎖線部位兩個,入料斗部位一個,這些設備大幅降低震動,同時保持高質量。

The automatic book sewing machine features three cam boxes: two for the sewing and one for the feeder. These devices minimize vibrations and maintenance despite high output speed.



鎖線馬鞍是由"凸輪箱"的凸輪軸驅動。其傳動部件運作在密封的油槽中。這一先進的傳動系統設計確保凸輪有極長的使用壽命,且無需任何日常檢測和維護。

Sewing stitching saddle is driven by the camshaft of the cam box. Its transmission components operate in a sealed oil tank. This state-of-the-art drive system design ensures that cams have an extremely long service life without any routine inspection and maintenance.

((

BCL-220c (BCL-220c*) 型全自動鎖線機符合歐盟 CE 認證 BCL-220c (BCL-220c*) Fully Automatic Sewing Machine is CE-Marked.


北宸機器公司對於目錄中產品的技術及特性更新保留自己的權 力不再另行通知


Best Chen Binding Machinery Technology Company reserves rights to update the technical and features of the products in the catalogue without notice.

BCL-220c (BCL-220c*)

技術參數 Technical Parameters

最高機械速度	13,000 轉 / 小時
Maximum machine speed	13,000 spin/hr
最小書帖尺寸	75 × 120 毫米
Minimum signature size	75 *120 mmn
最大書帖尺寸	320 × 440 毫米 或 320 × 520 毫米 *
Maximum signature size	320*440 mm or 320*520 mm *
揭頁器數目	上部 4 個,下部 4 個 +1 個長短邊揭頁器
The number of signature	Upper four, lower four with long
opening head	and short signature openers.
針數	10 (12)*
Number of sewing stitch	10 (12)*
針距	19 毫米
Pitch of sewing stitch	19 mm
額定功率	6.35 干瓦
Rated power	6.35 kw
標準電壓	380 伏 ,220 伏 ,60 赫茲 ,3 相
Standard voltage	380 v, 220 v, 60 Hz 3 phases
耗氣量(外部供給)*	最大 500 升 / 分鐘 (7 巴)
Air consumption	Max 500L/min (7P)
設備淨重	3680 公斤 (3800 公斤)*
Net weight	3680 kg (3800 kg)*





乗成-型錄-19x26cm-PC12-CS6. indd 7 2024/5/16 下午 03:25:52