

MODEL BCL-200s

北宸公司推出200s型的鎖線機系列內含了高性能和頂級工程質量能使鎖線產品達到所須的品質與質量。

Best Chen company has introduced the 200s sewing machine series contains high performance and top-of-the-line engineering quality to enable sewing products to achieve the required quality.



特性 Features


200s型的鎖線機最高運轉速度為每小時12,000轉，設計合併了最新的解決方案，能夠完成需求的質量。

With a maximum operating speed of 12,000 s/h, the 200s-type sewing machine is designed to combine the latest solutions to complete the quality of the requirements.



10英寸彩色觸摸屏配上PLC系統能控制機器的所有功能。

The 10-inch color touch screen is equipped with a PLC system that controls all the functions of the machine.

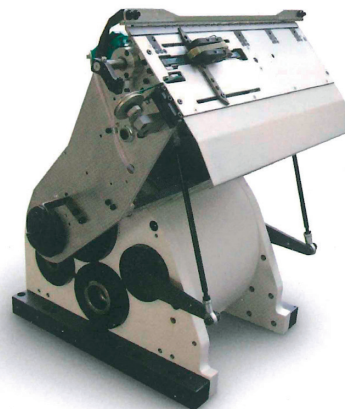


鎖線馬鞍是由“凸輪箱”的凸輪軸驅動。其傳動部件運作在密封的油槽中。這一先進的傳動系統設計確保凸輪有極長的使用壽命，且無需任何日常檢測和維護。

Sewing stitching saddle is driven by "the camshaft of the cam box". Its transmission components operate in a sealed oil tank. This state-of-the-art drive system design ensures that cams have an extremely long service life without any routine inspection and maintenance.



本鎖線機可以選配，有影相拍照之功能，能防止書帖配頁順序內容錯誤。

This sewing machine can be optional. There is the function of image photography which can prevent the signatures with page order content errors.

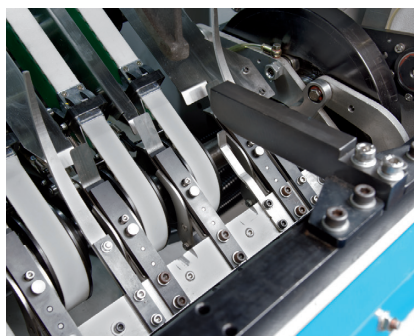


進料傳送將以最新款雙支點凸輪軸臂能使書帖更穩更輕鬆的將書帖傳送，將減少停機的情況。

Feeder delivery will reduce shutdowns by making the signature more stable and easier to deliver with the latest dual fulcrum camshaft arm.




BCL-200s 型全自動鎖線機符合歐盟 CE 認證
BCL-200s Fully Automatic Sewing Machine is CE-Marked.

北宸機器公司對於目錄中產品的技術及特性更新保留自己的權力不再另行通知
Best Chen Binding Machinery Technology Company reserves rights to update the technical and features of the products in the catalogue without notice.

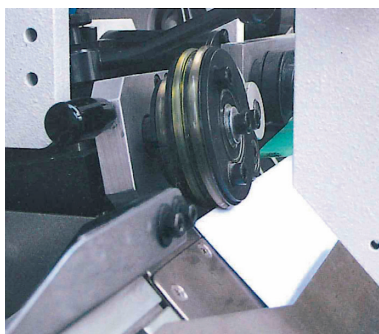

加速輪的高度可以根據每個書帖的厚度來編程。

The height of the acceleration wheel can be programmed according to the thickness of each signature.

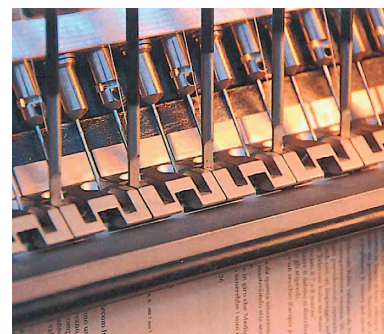

線針和鉤針可非常容易插入由底針沿著書帖背脊打的孔內，這保證了最高的鎖線品質。

Sewing stitching and crochet can be easily inserted into the hole that the bottom needle punches along the spine, ensuring the highest sewing thread's quality.

BCL-200s

技術參數 Technical Parameters

最高機械速度 Maximum machine speed	200 轉 / 分鐘 200 spin/min
最小書帖尺寸 Minimum signature size	75 x 120 毫米 75 *120 mmn
最大書帖尺寸 Maximum signature size	320 x 420 毫米 320*420 mm
揭頁器數目 The number of signature opening head	上部 4 個，下部 4 個 +1 個長短邊揭頁器 Upper four, lower four with long and short signature openers.
針數 Number of sewing stitch	10 10
針距 Pitch of sewing stitch	19 毫米 19 mm
額定功率 Rated power	4.5 千瓦 4.5 kw
標準電壓 Standard voltage	380 伏，220 伏，50/60 赫茲，3 相 380 v, 220 v, 50/60 Hz 3 phases
耗氣量（外部供給）* Air consumption	最大 450I/分鐘（6 巴） Max 450I/min (6P)
設備淨重 Net weight	3300 公斤 3300 kg

